


The ServiBOOST unit is designed to increase the gas pressure to domestic properties whilst the Gas Networks programme in the necessary remedial work to permanently resolve a low pressure problem.


The automated device provides a pressure uplift to 21.5mbar at a flow rate up to 3scmh (6scmh possible). When the pressure uplift device is not operating the maximum allowable pressure drop across the device is 1mbar.




Specification	
Installation Pressure	Max. 75mbar
ECV Size	3/4"
Operating Pressure	17-21.5mbar
Low Pressure cut-off	10mbar
Ingress Protection	IP54
Voltage	12V
	12.6V (max open-circuit voltage)
Current	0.5A (accelerating)
	0.34A (running – typical)
	0.01A (standby)

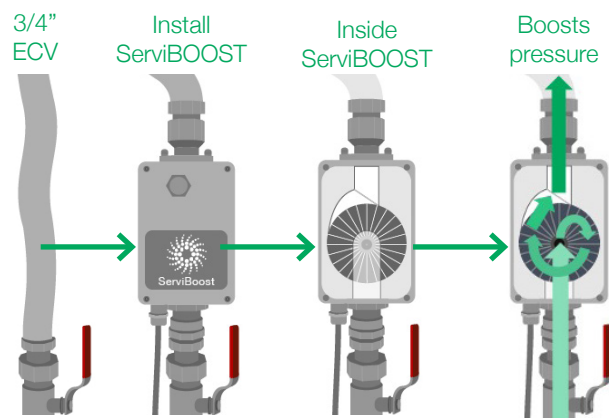

ServiBOOST	
ServiBOOST Weight	1.9kg
ServiBOOST Dims	230 x 85 x 69mm
Operating temp	-10 to 40°C
Storage temp	-20 to 60°C

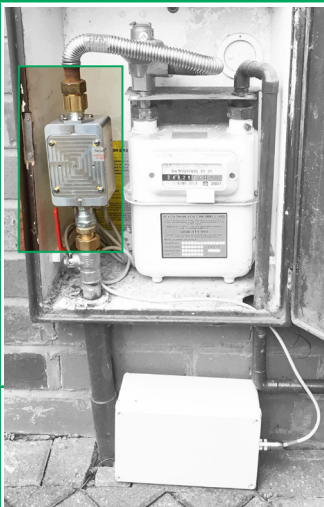

Battery	
Battery Weight	1.9kg
Battery Dims	230 x 140 x 95mm
Operating temp	-10 to 40°C
Storage temp	-20 to 60°C
Battery life	Approx 1 week



**CONTACT OUR TEAM TODAY TO DISCUSS YOUR REQUIREMENTS**  
**01423 816060 > [info@synthotech.co.uk](mailto:info@synthotech.co.uk) > [www.synthotech.com](http://www.synthotech.com)**