


The Meter Control Exchange system is a simple way of replacing valves on live gas pipes

- Adaptors allow use on range of pipe sizes and ECV types including 90° semi-concealed meter valves.
- Can be used on both Metallic and PE up to 75mbarg.
- For use on all ECVs from ½” to 2”, 19mm to 32mm Copper and 16mm to 32mm PE.
- There are a variety of stoppers both ridged, flexible, Hard (black) and Soft (blue) for ease of access in confined space.
- One person operation.



- Contains adaptors for BSP and BS 746 threads.
- Stargland™ technology ensures controlled gas operation.
- Designed to pass through varying valve types and geometries.
- Able to pass around long or short radius bends.

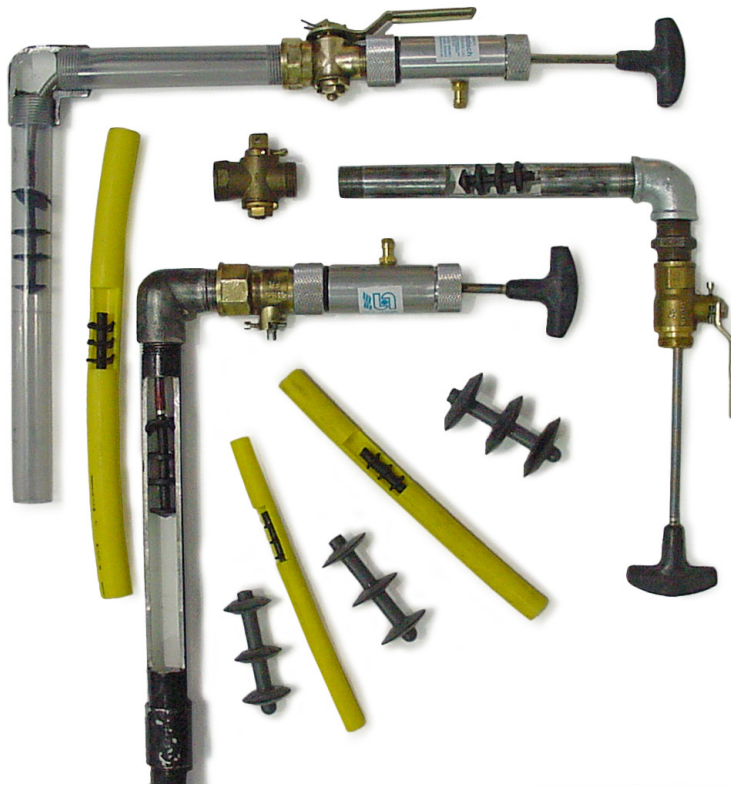

- Significantly reduces the duration that the customer is off gas.
- Designed for use in restricted areas making it easy and quick to use.
- Avoid the need for planned maintenance operations to isolate pipework systems, particularly in multi-occupancy or high rise buildings.



**CONTACT OUR TEAM TODAY TO DISCUSS YOUR REQUIREMENTS**  
**01423 816060 > info@synthotech.co.uk > www.synthotech.com**

©2020 Synthotech Ltd. All rights reserved to make changes to design and specification without prior notice or consent. E&OE



M-CEX stopper data matrix M-CEX stopper data matrix

Size	16mm	20mm	25mm	3/4"	3/4"	3/4"	3/4"	1"	1"	1"	1"	1-1¼"	1-1¼"	1-1¼"	1-1¼"	1-1½"	1-1½"	2"	2"	
Desc	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	M-CEX	START	M-CEX	M-CEX	START	M-CEX	START	
Type	Rigid	Rigid	Rigid	Rigid	Flexi	Rigid	Flexi	Rigid	Flexi	Rigid	Flexi	Rigid	Flexi	Flexi	Rigid	Rigid	Rigid	Rigid	Rigid	
Body																				
ID Col	White																			
Con- nection	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	2BAm	M8f	M8f	M8f	M8f	M8f	
Part No.	202722	202721	202618	10B0 176A	10B0 175A	202844	302845	10B0 174A	10B0 173A	202846	302847	202689	302800	302810	202969	228263	228270	228262	228271	
M-CEX	Domestic	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
	Industrial														✓	✓		✓		
Semi Concealed					✓			✓												
Isolator							✓				✓			✓			✓		✓	
CaPEX						✓	✓			✓	✓									
Polyethylene Pipe	16	✓																		
	17.5		✓																	
	20		✓																	
	20 ServiFlex		✓																	
	25			✓	✓	✓	✓	✓												
	32							✓	✓	✓	✓									
Metallic Pipe	32 ServiFlex							✓	✓	✓	✓									
	½"																			
	¾"				✓	✓	✓	✓												
	1"							✓	✓	✓	✓									
	1																			
	1-1¼"												✓	✓	✓	✓				
Dims	L	51.5	51.5	51	52	61	52.5	61	70	84	70	84	64.5	91	75	100	100	70	100	70
	Ø	12	16.5	25	25	25	25	25	30	30	30	30	39	39	39	39	43	43	55	55
Weight (g)	5	6	7	10	9	10	9	12.5	20	12.5	20	11	15	15	25	40	25	60	40	

CONTACT OUR TEAM TODAY TO DISCUSS YOUR REQUIREMENTS  
 01423 816060 > [info@synthotech.co.uk](mailto:info@synthotech.co.uk) > [www.synthotech.com](http://www.synthotech.com)

©2020 Synthotech Ltd. All rights reserved to make changes to design and specification without prior notice or consent. E&OE



SYNTHOTECH